



EXPERTS IN FILTRATION

# Water Treatment

## Carbon and Media Cartridges

[www.fileder.co.uk](http://www.fileder.co.uk)




# Carbon Technology

Utilised for several hundred years, carbon is considered one of the oldest means of water purification. Although impossible to trace the exact date and time, there is evidence of its usage and importance throughout history, from the ancient world to the modern era.

## How Carbon Works

The cross-section below exposes the huge network of cracks and micropores that determines carbon's effectiveness at removing a wide range of contaminants.

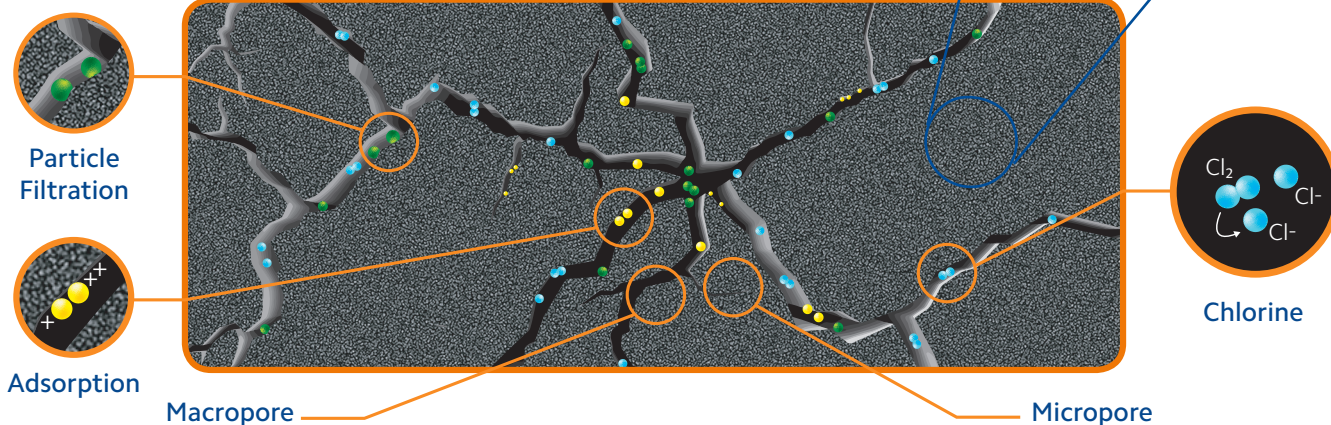

### Particle Filtration Sediment and Suspended Solids

Every carbon block cartridge has a given micron rating to indicate the physical size of suspended particulate that can be removed by the cartridge. To prevent premature sediment blockage before the chlorine capacity of the carbon has been exhausted, pre-filtration, such as the SPECTRUM SSP or PSP, is recommended to prolong the life of the cartridge.

### Adsorption Organics and Heavy Metals

Carbon is a naturally adsorptive media, removing dissolved contaminants from a solution. When heated to 870°C, during the activation process, millions of tiny micropores are created throughout the structure of the cartridge, attracting large organic molecules and heavy metals to the surface.

### Chemical Reaction Chlorine and Chloramine

Through chemical interactions with the activated carbon, reactive chlorine molecules are converted to less reactive chloride ions. Chloramine can also be removed through this process although the reaction occurs at a much slower rate. Speciality cartridges such as the SPECTRUM PCB have been specifically designed to effectively target chloramine.

## Carbon Flow Rate

The longer water comes into contact with carbon, generally the more effective the treatment process will be, whether removing organics, heavy metals, chlorine or chloramine. Even a small increase over the recommended flowrate can cause dramatic decreases in carbon treatment's effectiveness. Therefore it is imperative to size a carbon treatment system properly, ensuring that the flowrate allows enough contact time to remove the undesired contaminants. The recommended flowrate for each cartridge is shown on the product page (as illustrated, right).

@ Flow Rate (LPM)			
Specifications			
Max. Operating Temp. 52°C			
Max. Operating Pressure 2.5 bar			
SCB Properties			
on (L)	Chlorine Reduction (L) @ 0.2ppm	Pressure Drop (Bar) @	Flow Rate (LPM)
113,750	0.3	0.3	3.8
227,500	0.3	0.3	7.6
356,850	0.4	0.4	7.6
713,700	0.4	0.4	15.1

rine capacity using 2mg/l free available chlorine at 0.5mg/l breakthrough

# Carbon's Effectiveness at Removing...

## Excellent

Chloramine	Odours
Chlorine	Oil-dissolved
Dyes	PCBs
Glycols	Pesticides
Herbicides	Sodium Hypochlorite
Hydrogen Peroxide	Taste
Insecticides	THMs
Iodine	

## Good

Organic Acids  
Organic Salts  
Potassium Permanganate  
Solvents  
Sulphonated Oils  
Tannins

## Fair

Acetic Acid  
Detergents  
Heavy Metals  
Hydrogen Sulfide  
Plating Wastes  
Soap

## Carbon Cartridge Construction

From raw material, through to activation and end product.







## FloPlus™ - Fibredyne

### Outstanding *Cryptosporidium* and *Giardia* Cyst Protection

With NSF/ANSI certified cyst, chlorine and sediment reduction, the FloPlus is one of the leading cartridges in its field. The FloPlus utilises Fibredyne media with a 0.5 micron rating that has a low pressure drop and flows

like a 10 micron. Whilst Fibredyne media is effective at targeting sediment and the FloPlus can be used as a stand-alone solution, a 5 micron pre-filter is recommended to maximise life and performance of this cartridge.

Performance based on 10" cartridge. \*Life in UK water based on free chlorine concentration of 0.2mg/l.

### Key Features

- Certified for reduction of *Cryptosporidium* and *Giardia* Cysts
- Flow rate and pressure drop of a 10µm block, efficiency of a 0.5µm cartridge

### Typical Applications

- Borehole and private water supply
- Designated drinking water outlets



### Configurations

Micron (µm)
0.5

Length (")
10=9¾      20

Diameter
Standard      Large = BB



### Compliance

NSF/ANSI Standard 53 Certified



### Materials of Construction

**Carbon Type**  
Bonded Powder  
Activated Carbon

**Netting**  
Polyethylene

**End-cap**  
Polypropylene

**Gasket**  
Santoprene



### Specification

**Max. Operating Temperature**  
82°C

**Max. Operating Pressure Differential**  
1.8 bar

### FloPlus™ Properties


Length (")	Chlorine Reduction (L) @ 2mg/l *	Chlorine Reduction (L) @ 0.2mg/l **	Pressure Drop (Bar) @	Flow Rate (LPM)
10	37,800	330,750	0.14	3.8
20	75,700	662,375	0.14	7.6
10BB	94,600	827,750	0.28	7.6
20BB	189,000	1,653,750	0.28	15.2

\*Chlorine capacity using 2mg/l free available chlorine at 0.5mg/l breakthrough

\*\*Calculated chlorine capacity using 0.2mg/l free available chlorine at 0.05mg/l breakthrough



### Dimensions & Packaging

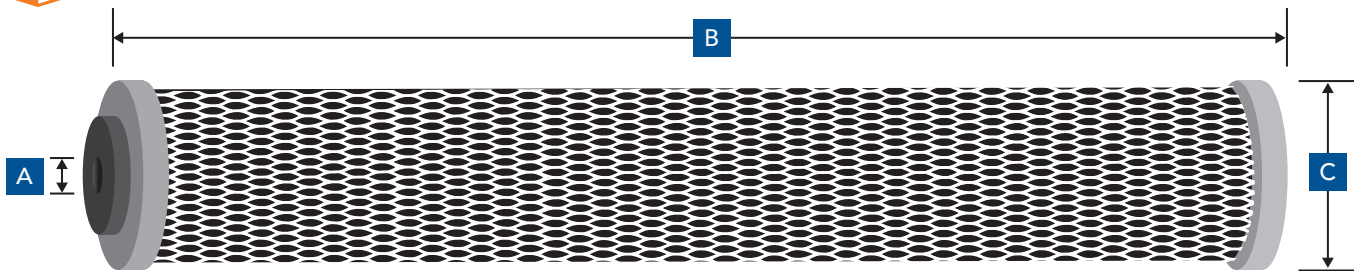

Dimensions (mm)			
Length (")	A	B	C
10	25	248	73
20	25	508	73
10BB	28	248	118
20BB	28	508	118

Packaging	
Box Qty	Box Weight (kg)
12	3
12	6
12	4
6	8

### Part Number

Code	Length
FloPlus	10, 20
	10BB, 20BB

e.g. FloPlus-10

