


PREMIER - UP TO 3600 LPM

The largest multi-cartridge housing, the 36 round exemplifies a blend of functionality and ease-of-use in high capacity industrial applications. Cartridge change-out can be a one person task with no specialist tools with the davit arm and eye bolt configuration. With flow rate capabilities of up to 3600 litres per minute, this housing is supplied with 6" DN150 inlet and outlet connections, drain ports for complete emptying of the housing during change-out and pressure gauges to provide accurate differential pressure readings for monitoring filter cartridge performance.

The Glass Bead finish hardens the housing surface, increasing resistance to wear & corrosion.

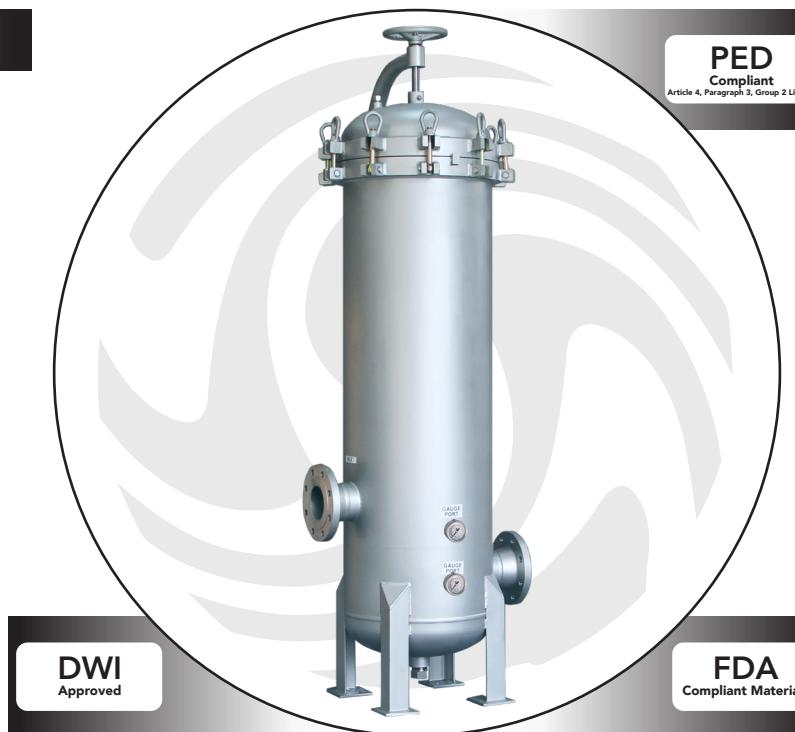

FEATURES & BENEFITS



- Swing bolt closure for secure seal
- Universal cartridge adaptors securely hold 222, DOE or AA cartridges
- Drain ports allow for quick and easy cartridge change outs
- Protective Glass Bead finish

TECHNICAL DATA




Port Sizes (")	6 DN150 Flange
Cartridge Compatibility (")	40
End-Cap Compatibility	EH, EG, DOE, AA
Pressure Rating (bar)	10
Temperature Rating (°C)	121

MATERIALS OF CONSTRUCTION




Head & Body: 316L Stainless Steel
 Eye Nut &
 Swing Bolt: 304 Stainless Steel
 Legs: 304 Stainless Steel
 O-ring: Buna-N

DIMENSIONS

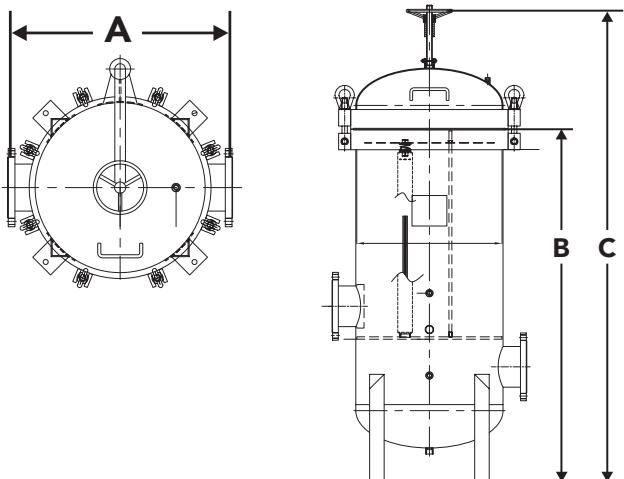

Dimensions (mm)			
Housing	A	B	C
PFH-SGB-36-40	804	1730	2167

FLOW RATE

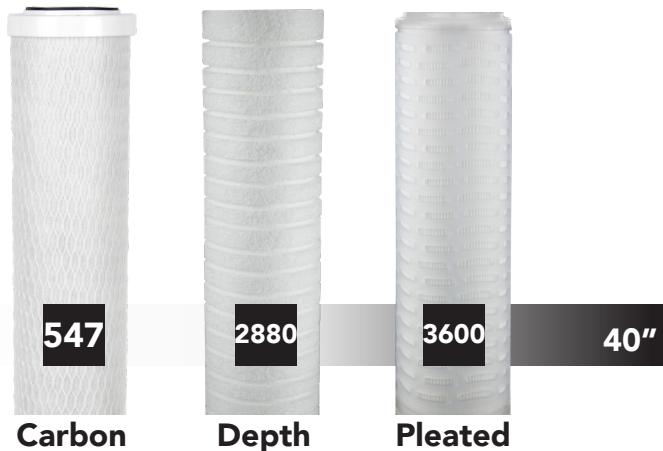

ORDERING GUIDE



Code	Material	No. of Cartridges	Cartridge ("")	Port Size ("")	Code
PFH	SGB	36	40	6	G

i.e. PFH-SGB-36-40-6-G

PRODUCT RANGE



The below products have often been associated with this product.



Premier 7



Premier 12



Premier 21



Premier 36

Flow up to 700 lpm

Flow up to 1200 lpm

Flow up to 2100 lpm

Flow up to 3600 lpm