


HIGH FLOW - UP TO 1300 LPM

Requiring no tools for fast and easy filter change out, this single round housing provides an alternative to a regular diameter multi-cartridge housing at 15% of the capital cost and almost a 50% reduction in footprint. The only housing in the High Flow housing range to have adjustable legs allowing control over the vessel's height. The SPECTRUM SS HF makes installation simple and stress-free.



FEATURES & BENEFITS

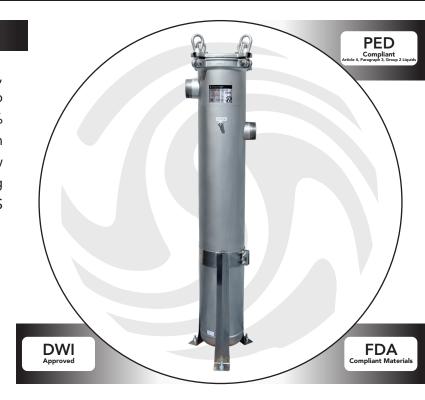

- Swing bolt closure for easy change out
- Adjustable legs to aid installation
- Drain port as standard, to allow for easy emptying of system and to help avoid contact with fluid
- Pressure gauges to optimise cartridge life

TECHNICAL DATA



Port Sizes (")	3 BSPM		
Cartridge Compatibility (")	40		
End-Cap Compatibility	SOE		
Pressure Rating* (bar)	10		
Temperature Rating (°C)	120		

^{*}Hydrostatic pressure rating.

MATERIALS OF CONSTRUCTION



316L Cast Stainless Steel - Glass Head:


Bead Finish

316L Cast Stainless Steel - Glass Body:

Bead Finish

Buna-N Gasket:


DIMENSIONS

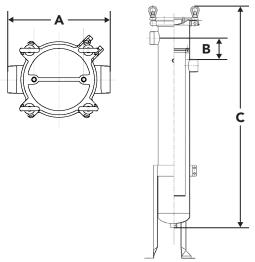

Dimensions (mm)							
Housing	Α	В	С				
PFH-SGB- 1HF-40	330	250	1450				





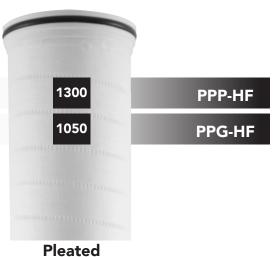

ORDERING GUIDE



Code	Material	No. of Cartridges	Cartridge (")	Port Size (")	Code
PFH E	SGB E	1HF E	40	3	GP-ML

i.e. PFH-SGB-1HF-40-3-GP-ML

PRODUCT RANGE



The below products have often been associated with this product.



1 Round

Flow up to 1300 lpm



2 Round

Flow up to 2600 lpm



4 Round

Flow up to 5200 lpm



6 Round

Flow up to 7800 lpm



7 Round

Flow up to 13,300 lpm